

(19) 日本国特許庁 (J P)

(12) 公開特許公報 (A)

(11) 特許出願公開番号  
特開2000-94068  
(P2000-94068A)

(43) 公開日 平成12年4月4日 (2000.4.4)

(51) Int.Cl.  
B 2 1 D 39/20  
39/10

識別記号

F I  
B 2 1 D 39/20  
39/10

テマコード\* (参考)

A

Z

審査請求 未請求 請求項の数 5 O L (全 5 頁)

(21) 出願番号 特願平10-281817

(22) 出願日 平成10年9月16日 (1998.9.16)

(71) 出願人 000003713

大同特殊鋼株式会社

愛知県名古屋市中区錦一丁目11番18号

(72) 発明者 土屋 允紀

三重県四日市市大字羽津3535-1

(74) 代理人 100095669


弁理士 上野 登 (外1名)

(54) 【発明の名称】 拡管マンドレル及びこれを用いた長尺管の拡管方法

(57) 【要約】

【課題】 鋼材による長尺管を拡管するに際し、小さい摩擦抵抗でエネルギー効率良く、しかも寸法精度にも優れた加工を行うことのできる拡管マンドレル及びこれを用いた長尺管の拡管方法を提供すること。

【解決手段】 鋼材による長尺管26の一方の開口端より拡管マンドレル20を挿通し、この拡管マンドレル20を前進回転させながら拡管マンドレル本体25の外周面に設けられる複数の拡径ローラ23、23・・・を長尺管26の内壁面に圧接させ、その長尺管26の径方向外方へ押し広げて拡径する。

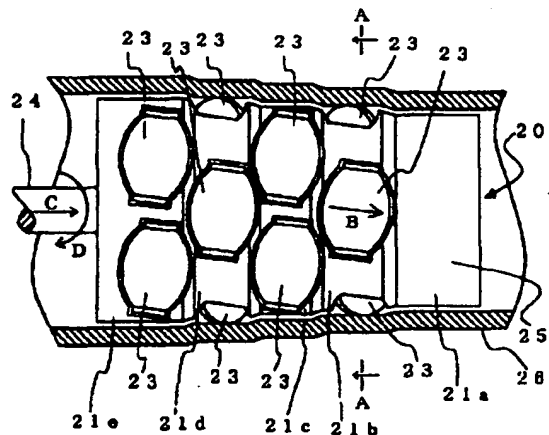

## 【特許請求の範囲】

【請求項1】 鋼材による長尺管に挿通される拡張マンドレル本体の外周面に、該長尺管の内壁面に圧接され、かつ、その長尺管の略管長方向に回転可能な拡張ローラが配設されていることを特徴とする拡張マンドレル。

【請求項2】 前記拡張ローラは、マンドレル本体の周方向に等間隔に複数配設されていることを特徴とする請求項1に記載の拡張マンドレル。

【請求項3】 前記拡張マンドレル本体は、長尺管に挿通される先端部より基端部に向けて漸次大径となるように多段階的に形成され、その各径部に前記拡張ローラが周方向に等間隔に夫々複数設けられていることを特徴とする請求項1又は2に記載の拡張マンドレル。

【請求項4】 前記拡張マンドレル本体は、進退動自在かつ回転自在なブランジヤの先端に設けられ、前記拡張ローラの回転方向は該ブランジヤの前進回転動に対応して長尺管の管長方向に対してやや傾きを持って設けられていることを特徴とする請求項1、2又は3に記載の拡張マンドレル。

【請求項5】 拡張されるべき長尺管の一方の開口端より拡張マンドレルを挿通し、該拡張マンドレルの外周面に設けられる拡張ローラにより前記長尺管の内壁面を外方へ押圧するようにした長尺管の拡張方法。

## 【発明の詳細な説明】

【0001】

【発明の属する技術分野】 本発明は、鋼材による長尺管を拡張するのに好適な拡張マンドレル及びそれを用いた長尺管の拡張方法に関するものである。

【0002】

【従来の技術】 従来、鋼材による長尺管を拡張するに際しては、例えば、図4に示したようなテーパ付拡張マンドレルを使用して拡張することが行なわれている。これは、長尺管26の一方の開口端より図示のテーパ付拡張マンドレル20を挿通し、所定の荷重Pを印加しながらこの拡張マンドレル20を長尺管26に押し込むことにより、この拡張マンドレル20のテーパ部22から大径部24の部分で長尺管26の内壁面を外方へ押圧し、拡張しながら長尺管26内を前進させるものである。

【0003】 これに関する技術はいくつかの特許公報に既に示されており、例えば、特開平7-148516号公報は、長尺管をダイスによって引き抜くに際し、長尺管内に心金（マンドレル）を通して拡張と引抜きとを同時に行なうものである。

【0004】 また例えば、特表平507610号公報（国際公開番号W093/25799）には、石油掘削パイプを地中のボアホール内で拡張するに際し、拡張マンドレルを引き上げながら拡張するものである。更に、国際公開W098/00626号公報のものも同様に石油掘削パイプに拡張マンドレルを通して拡張するもので、この公報のものは拡張マンドレルの外周面にセラミ

ックスをコーティングすることにより拡張時の摩擦抵抗を小さくしようとするものである。

【0005】

【発明が解決しようとする課題】 しかしながら、このような従来一般に知られる拡張マンドレル（テーパ付のものを含む）によれば、いずれもマンドレルに加えた荷重により長尺管の内壁面を押圧し拡張しようとするものであるから、長尺管の内壁面とマンドレルとの間の摩擦抵抗抗が大きく、マンドレルがスムーズに動かず、加工スピードが遅いという問題がある。

【0006】 また、このように長尺管とマンドレルとの摩擦抵抗抗が大きいくことで摩擦熱が発生し、マンドレルに印加される荷重が十分に長尺管の拡張力として伝達されずエネルギー効率が悪いという問題もある。更に、かかる摩擦抵抗抗によってマンドレルがスムーズに動かずに間歇的な前進運動を繰り返して不連続に移動するため、拡張された長尺管の外径が一定せず表面が波打現象を起こしたり、或いは、摩擦抵抗抗によって長尺管に加工歪みが生じるといった問題が懸念されるものであった。

【0007】 本発明の解決しようとする課題は、鋼材等の長尺管を拡張するに際してその拡張スピードを上げることができ、しかも、長尺管とマンドレルとの摩擦抵抗抗を小さくして加工によるエネルギー効率を高め、更に品質面でも拡張表面の波打ち等もない拡張マンドレル及び、それを用いた長尺管の拡張方法を提供することにある。

【0008】

【課題を解決するための手段】 この課題を解決するために本発明の拡張マンドレルは、鋼材による長尺管に挿通される拡張マンドレル本体の外周面に、該長尺管の内壁面に圧接され、かつ、その長尺管の略管長方向に回転可能な拡張ローラが配設されていることを要旨とするものである。

【0009】 上記構成を有する本発明の拡張マンドレルによれば、鋼材による長尺管に挿通し牽引又は押し込むことによりマンドレル本体の外周面に設けられる拡張ローラがその長尺管の内壁面に圧接された状態でその略管長方向に回転しながら前進していく。そのために長尺管の内壁面が半径方向へ押し広げられて塑性変形して拡張される。

【0010】 その際に、前記拡張ローラが前記長尺管の内壁面を回転しながら拡張されるものであるから、長尺管の内壁面と拡張マンドレルとの間の摩擦抵抗抗は非常に小さい。そのために拡張マンドレルが長尺管内を低い移動抵抗でスムーズに移動することができるので、加工スピードを上げることができ、また、拡張マンドレルの挿通に必要な牽引力又は押進力は小さくて済むようになり、摩擦熱などの発熱も生じることなくエネルギー効率が高められることになる。また、摩擦抵抗抗によってマンドレルがスムーズに動かないことによって生じる長尺管

表面の波打ち現象もなくなり、加工精度を向上させることができる。

【0011】この場合に、前記拡張ローラをマンドレル本体の周方向に複数等間隔に配設するようにすれば、長尺管の内壁面が周方向均等に分散された拡張力によって拡張されるのでその拡張された長尺管の断面形状の真円度が増し、寸法精度良く拡張することができる。

【0012】この場合に、前記拡張マンドレル本体は、長尺管に挿通される先端部より基端部に向けて漸次大径となるように多段階的に形成され、その各径部に前記拡張ローラが周方向に等間隔に夫々複数設けられるようにするとよい。そうすれば、長尺管の拡張が多段階に分けて徐々に行なわれることになり、その分各段階における摩擦抵抗が減少し、拡張ローラの負荷も軽減され、加工スピードを上げることができる。

【0013】そして更に、前記拡張マンドレル本体は、進退自在かつ回転自在なブランジの先端に設けられ、前記拡張ローラの回転方向は該ブランジの前進回転に対応して長尺管の管長方向に対してやや傾きを持って設けられるようにするとよい。そうすれば、拡張マンドレルがブランジの前進と回転によって長尺管内を前進しながら周方向にも回転することになり、それによって拡張ローラが長尺管の内壁面に均等に圧接されて真円度の高い長尺管が得られることになる。また、拡張マンドレルが長尺管内を回転しながら前進移動するので、その進行方向への移動がスムーズに行なわれ、速やかに拡張が行なわれることになる。

【0014】そして本発明に係る長尺管の拡張方法は、拡張されるべき長尺管の一方の開口端より拡張マンドレルを挿通し、該拡張マンドレルの外周面に設けられる拡張ローラにより前記長尺管の内壁面を外方へ押圧するようにしたことを要旨とするものである。

【0015】この場合にも請求項2又は3に記載のように、拡張ローラがマンドレル本体の周方向に等間隔に複数配設され、あるいは、拡張マンドレル本体が長尺管に挿通される先端部より基端部に向けて漸次大径となるように多段階的に形成され、その各径部に前記拡張ローラが周方向に等間隔に夫々複数設けられており、更に請求項4に記載のように拡張マンドレル本体が進退自在かつ回転自在なブランジの先端に設けられ拡張ローラの回転方向は該ブランジの前進回転に対応して長尺管の管長方向に対してやや傾きを持って設けられておれば、エネルギー効率良くスムーズに拡張加工が行なわれ、その加工寸法精度が優れたものになることは上述した通りである。

【0016】

【発明の実施の形態】以下に本発明の好適な実施の形態を図面を参照して詳細に説明する。図1は、本発明の一実施の形態に係る拡張マンドレルを拡張される長尺管に挿通した状態の外観図を示したものである。長尺管に関

しては断面図となっている。この拡張マンドレル20は、図示しない油圧シリンダのブランジ24の先端に一体的に設けられ、そのマンドレル本体25は長尺管26に挿通される先端部分からブランジ側の基端部分にかけて第1の径部21aから第5の径部21eまで多段階的にその径を徐々に大きくしている。そして各径部21a～21eの間はテーパ状になっている。

【0017】前記マンドレル本体25の各径部21a～21eには夫々長尺管26の内壁面に圧接され、かつ、前記ブランジ24の伸長動によって長尺管26の略管長方向に回転可能な拡張ローラ23が複数個ずつ（この実施例では4個ずつ）周方向に等間隔に設けられている。尚、前記ブランジ24は、図示されるように長尺管26内を進退動と回転動とを行なうように構成されている。

【0018】図2は、図1に示した拡張マンドレルの管長方向の断面図を示したものである。前記拡張ローラ23は第2の径部21bから第5の径部21eの夫々の外周を4等分する位置に設けられる拡張ローラ取付穴に1個ずつ配設されており、その回転方向は長尺管の管長方向に対してやや傾いた方向に設けられて前記ブランジ24の前進（矢示C方向）と回転（矢示D方向）の組み合わせによるマンドレル本体25のスパイラル回転方向（矢示B方向）とは逆方向（矢示B方向とは逆方向）に拡張ローラ23は内壁面に圧接されながら前進するように構成されている。

【0019】そして第2の径部21b及び第4の径部21dに夫々設けられる4個の拡張ローラ23の配設位置と第3の径部21c及び第5の径部21eに夫々設けられる4個の拡張ローラの配設位置とは図示のように円周方向に角度で45度ずれて互い違いに設けられている。そして各拡張ローラ23は、長尺管26の内壁面に圧接され、その内壁面を半径方向外方へ押圧拡張し塑性変形させながら、長尺管の管長方向に対してやや傾きを持つ矢印Bの方向へ回転しつつ前進するように構成されるものである。

【0020】図3は、前記図1に示した拡張マンドレルの管長方向に直交する方向（管径方向）の断面図を示したものである。該拡張マンドレル20の本体25の径部21bには円周方向に等間隔に4個の拡張ローラ23が配設されている。各拡張ローラ23は、拡張マンドレル本体25が前記ブランジ24の伸長動及び回転動に対応してスムーズに回転しながら前進運動を行なえるように、長尺管26の内接面に圧接されて拡張ローラ23が進行する方向が管長方向に対して夫々傾いた方向となるように配設される。

【0021】例えば、図3において上方に配設される拡張ローラ23はその回転軸の右方端の取付位置が左方端の取付位置よりも図面に向かって手前になるように設けられる。同様に、他の拡張ローラ23についても夫

々の回転軸の右回りの方の端部の取付位置が左回りの方の端部の取付位置よりも手前になるように設けられている。

【0022】しかしてこのように構成された拡張マンドレル20を用いて鋼材による長尺管26を拡張するに際しては、この拡張マンドレル20を図1及び図2に示したように長尺管26内の一方の開口端より挿通し、図示しない油圧シリンダによりプランジャ24を回転させながら前進させることにより、第1段階としてこの拡張マンドレル20の第2の径部21bに設けられる4個の拡張ローラ23が長尺管26の内壁面に圧接され、その各拡張ローラ23の回転に伴ってその各拡張ローラ23が圧接される部分の長尺管26の管壁がその径方向外方へ押し広げられる。

【0023】次いで、その長尺管26の拡張された内壁面には該拡張マンドレル20の第3の径部21cに設けられる4個の拡張ローラ23が圧接され、その部分の管壁がその径方向外方へ押し広げられる。更に、その長尺管26の拡張された内壁面には該拡張マンドレル20の第4の径部21dに設けられる4個の拡張ローラ23が圧接され、その部分の管壁がその径方向外方へ押し広げられる。

【0024】最終段階として、その長尺管26の拡張された内壁面には該拡張マンドレル20の第5の径部21eに設けられる4個の拡張ローラ23が圧接され、その部分の管壁がその径方向外方へ押し広げられる。こうして、本実施の形態の拡張マンドレル20を長尺管26の全体に挿通させると、全体が拡張された円形断面の長尺管26が得られ、その内径は第5の径部21eに設けられる4個の拡張ローラに外接する円の径とほぼ等しくなる。

【0025】そして、このように拡張マンドレル20の第2～第5の各径部21b～21eに夫々設けられる拡張ローラ23、23・・・により長尺管26が多段階にわたって徐々に拡張され、その間拡張ローラ23、23・・・は長尺管26の内壁面を回転しながら前進していくものであるから、長尺管26の内壁面と拡張ローラ23、23・・・との間の摩擦抵抗は少なく、スムーズな拡張加工が行われる。

【0026】また、その摩擦抵抗が少ないことにより、長尺管26の内壁面あるいは拡張マンドレル20のマンドレル本体25や拡張ローラ23、23・・・に摩擦熱の発生はほとんどないことから、拡張加工に伴うエネルギー損失も生じず、その分この拡張マンドレル20を前進させる油圧シリンダ等の負荷も小さくて済むことになる。

【0027】さらに、長尺管26内で拡張マンドレルの前進動がスムーズに行なわれることから、拡張時の管表面の波打ち現象も起こることはなく、径寸法精度の優れたものが得られることになる。

【0028】本発明は、前記した実施の形態に何ら限定されるものではなく、本発明の趣旨を逸脱しない範囲で種々の改変が可能である。例えば、前記実施の形態では、拡張マンドレルをプランジャの伸長動により長尺管に押し込み拡張する構成を示したが、拡張マンドレルが収縮動により牽引されて拡張するような構成とすることもできる。また、マンドレル本体の各径部に配設される拡張ローラの数も4個づつとは限らず、3個又は5個以上配設することも可能であり、拡張マンドレルの夫々の径部に配設する拡張ローラの個数が多いほど、それを用いて拡張された長尺管の断面形状がより真円に近くなることは言うまでもない。

【0029】また、前記実施の形態では各段階の径部に一列に拡張ローラを配設したが、複数列に、かつ各列の配設位置を互いにずらして配設すれば、より多くの拡張ローラを拡張マンドレルの円周に等間隔に配設することができ、その拡張マンドレルを用いることにより加工後の長尺管断面の真円度を上げることができる。一方、マンドレル本体25の全体形状を、その径が先端部から其端部へ向けて徐々に小径から大径になるようなテーパ形状に構成してもよい。

【0030】

【発明の効果】本発明の拡張マンドレル及びこれを用いた拡張方法によれば、鋼材による長尺管を拡張するに際し、拡張マンドレル本体の外周面に設けられる拡張ローラにより長尺管の内壁面を外方向へ押し、その拡張ローラの回転により長尺管内を前進させていくものであるから、拡張時の摩擦抵抗を少なくして、摩擦熱の発生を減少させることができるため加工のエネルギー効率の向上を図ることができる。また、拡張マンドレルが長尺管内をスムーズに移動できるので管表面の波打ち等の発生防止、加工スピードの向上が図られ、石油掘削パイプの拡張作業等に適用することは極めて有効である。

【0031】尚、請求項2に記載の発明のように、拡張ローラをマンドレル本体の周方向に等間隔に複数配設するようにすれば、その拡張された長尺管の断面形状の真円度が増し、寸法精度良く拡張することができ、また、請求項3に記載の発明のように、拡張マンドレル本体が、長尺管に挿通される先端部より基端部に向けて漸次大径となるように多段階的に形成され、その各径部に前記拡張ローラが周方向に等間隔に夫々複数設けられたものでは、各段階の拡張ローラの負荷が軽減され加工スピードを上げることができる。

【0032】更に請求項4に記載の発明のように、拡張マンドレル本体が、進退動自在かつ回転自在なプランジャの先端に設けられ、前記拡張ローラの回転方向は該プランジャの前進回転動に対応して長尺管の管長方向に対してやや傾きを持って設けられておれば、拡張マンドレルを長尺管内の周方向に回転させながら前進させていったときに、拡張ローラが長尺管の内壁面に均等にあたり、

真円度の高い長尺管が得られるとともに、その進行方向への移動がスムーズに行なわれ、速やかに拡張を行なうことができる利点を有する。

【図面の簡単な説明】

【図1】本発明一実施の形態に係る拡張管マンドレルを拡張される長尺管に挿通した状態の外観図である。

【図2】図1に示した拡張管マンドレルの管長方向の断面図である。

【図3】図1に示した拡張管マンドレルの管長方向に直交する方向（管径方向）の断面図である。

\*【図4】従来一般に知られるテーパ付き拡張管マンドレルの外観図である。

【符号の説明】

20 拡張管マンドレル

21 径部

23 拡張ローラ


24 ブラnja

25 拡張管マンドレル本体


26 長尺管

\*10


【図1】

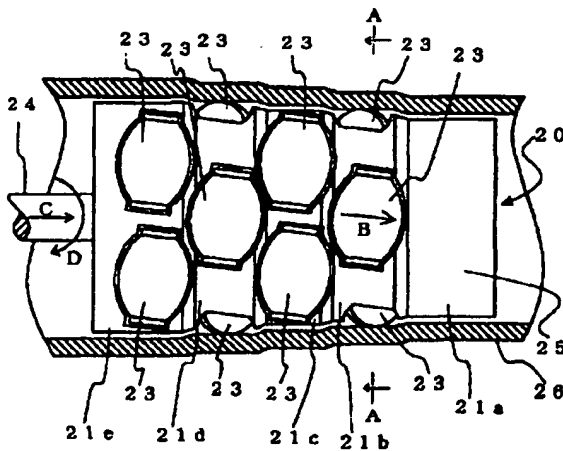


【図2】

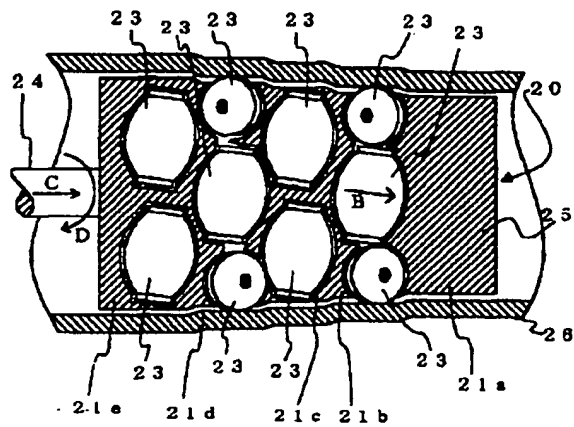

【図3】

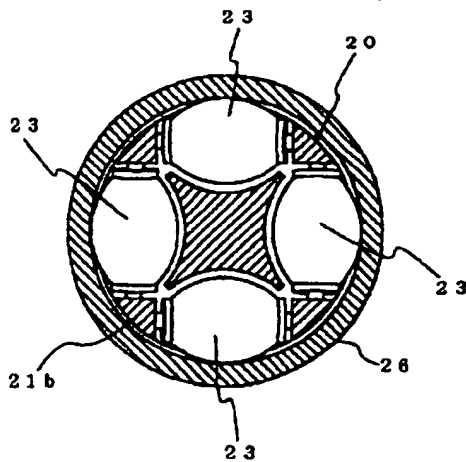

【図4】

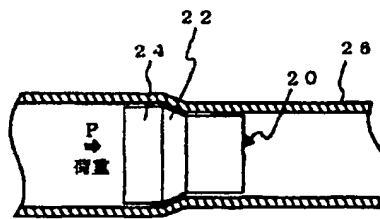

(19) Japan Patent Office (JP)  
(12) Japanese Unexamined Patent Application Publication (A)  
(11) Japanese Unexamined Patent Application Publication 2000-94068  
(P2000-94068A)  
(43) Publication Date: April 4, 2000

---

|                            |                    |            |                        |
|----------------------------|--------------------|------------|------------------------|
| (51) Int. Cl. <sup>7</sup> | Identification No. | FI         | Theme Code (Reference) |
| B21D 39/20                 |                    | B21D 39/20 | A                      |
| 39/10                      |                    | 39/10      | Z                      |

Application for inspection: Not yet filed  
Number of claims: 5 OL (total pages 5)

---

(21) Application No.: Japanese Unexamined Patent Application Publication H10-261817  
(22) Application Filed: September 19, 1996

(71) Applicant: 000003713  
Daido Steel Co., Ltd.  
1-11-18 Nishiki, Naka-ku, Nagoya-shi, Aichi-ken

(72) Inventor: Masaki Tsuchiya  
3535-1 Oaza Hadzu, Yokkaichi-shi, Mie-ken

(74) Agent: 100095669  
Noboru Ueno, Patent Attorney (and one other individual)

---

(54) Title of the Invention: EXPANSION MANDREL AND EXPANSION METHOD FOR LONG PIPE  
THAT USES THE EXPANSION MANDREL

(57) Summary  
(Problem)

Provide (1) an expansion mandrel that, when expanding a long pipe made of steel, has small frictional resistance and is energy efficient, with which it is possible to perform processing superior with respect to dimensional accuracy, and (2) an expansion method for a long pipe that uses this expansion mandrel.

(Means for Solving)

Pass expansion mandrel 20 through one of the opening ends of long pipe 26 made of steel, and while advancing/revolving this expansion mandrel 20, pressure weld to the interior surface of long pipe 26 a plurality of radial expansion rollers 23, 23, ..., which are established on the periphery of expansion mandrel main body 25, and radially expand by spreading outward in the radial direction of this long pipe 26.

[see source for drawing]

(Scope of Patent Claims)

(Claim 1)

Expansion mandrel in which radial expansion rollers, which are pressure welded to the interior surface of a long pipe made of steel and are revoluble in the rough pipe length direction of that long pipe, are arranged on the periphery of the expansion mandrel main body that is passed into the long pipe.

(Claim 2)

The expansion mandrel according to Claim 1, wherein said radial expansion rollers are multiply established at equal intervals in the circumferential direction of the mandrel main body.

(Claim 3)

The expansion mandrel according to either Claim 1 or Claim 2, wherein said expansion mandrel main body is formed in a multistage manner such that the radius progressively increases towards the rear edge from the front edge that is passed into the long pipe, and said radial expansion rollers are multiply established circumferentially at equal intervals on each radial region.

(Claim 4)

The expansion mandrel according to Claim 1, Claim 2, or Claim 3, wherein said expansion mandrel main body is established on the tip of a plunger that can advance and retreat freely and can revolve freely, and the revolution direction of said radial expansion rollers is established having a slight inclination with respect to the pipe length direction of the long pipe corresponding to said forward revolution of the plunger.

(Claim 5)

Expansion method for long pipe in which the expansion mandrel is passed through one of the opening ends of the long pipe to be expanded, and the interior surface of said long pipe is pressed outward by radial expansion rollers that are established on the periphery of the expansion mandrel.

(Detailed Description of the Invention)

(0001)

(Technical Field of the Invention)

The present invention is related to an expansion mandrel that is ideal for expanding long pipe made of steel, and the expansion method for long pipe that uses this expansion mandrel.

(0002)

(Prior Art)

Conventionally, when expanding long pipe made of steel, expansion is performed by using a tapered expansion mandrel such as that shown in Figure 4, for example. With this, the indicated tapered expansion mandrel 20 is passed through one of the opening ends of long pipe 26, and by driving this expansion mandrel 20 into long pipe 26 while applying prescribed load P, the interior surface of long pipe 26 is pressed outward with the large radius region 24 from the tapered region 22 of this expansion mandrel 20, and it is advanced through the interior of long pipe 26 interior while expanding.

(0003)

Technology related to this has been previously shown in numerous patent publications, and Unexamined Patent Application Publication H7-148516, for example, is an invention that, when extracting the long pipe with a die, performs expansion and extraction simultaneously by passing a core bar (mandrel) through the inside of the long pipe.

(0004)

Moreover, Published Japanese Translation of a PCT Application H-507610 (International Publication Number WO93/25799) documents an invention that, when expanding an oil drilling pipe with the borehole interior underground, expands while drawing the expansion mandrel up. Furthermore, the invention of International Publication WO98/00626 likewise expands by passing an expansion mandrel through the oil-drilling pipe, and the invention of this publication attempts to reduce the frictional resistance at the time of expansion by coating the periphery of the expansion mandrel with ceramics.

(0005)

(Problems Addressed by the Invention)

However, through such generally known conventional expansion mandrels (including tapered mandrels), because all of them attempt to radially expand by pressing the interior surface of the long pipe with a load added to the mandrel, there are problems in which the frictional resistance between the interior surface of the long pipe and the mandrel is large, the mandrel does not move smoothly, and processing speed is slow.

(0006)

Moreover, there are also problems in which frictional heat is generated due to the fact that the frictional resistance between the long pipe and the mandrel is large; in this way, the load applied to the mandrel is not sufficiently transmitted as the expansion force of the long pipe and the energy efficiency is low.

Furthermore, there was also fear of the problem in which, because the mandrel does not move smoothly due to the frictional resistance and travels discontinuously by repeating intermittent thrusting movements, the external diameter of the expanded long pipe is not constant and a rippling phenomenon occurs on the surface, or processing deformations develop on the long pipe due to frictional resistance.

(0007)

The problems addressed by the present invention are to enable the increase of expansion speed when expanding long pipe made of steel or other material, reducing the frictional resistance between the long pipe and the mandrel and raising energy efficiency through processing, further providing an expansion mandrel without ripples on the expansion surface from the perspective of quality, and providing an expansion method for long pipe that uses this expansion mandrel.

(0008)

(Means for Solving the Problems)

In order to solve these problems, the expansion mandrel of the present invention is summarized in that radial expansion rollers, which are pressure welded to the interior surface of a long pipe made of steel and are revolvable in the rough pipe length direction of that long pipe, are arranged on the periphery of the expansion mandrel main body that is passed into the long pipe.

(0009)

Through the expansion mandrel of the present invention that has the aforementioned configuration, by passing the mandrel through a long pipe made of steel and pulling or driving it, the radial expansion rollers that are established on the periphery of the mandrel main body advance while revolving in the rough pipe length direction in the state in which they are pressure welded to the interior surface of that long pipe. Therefore, the interior surface of the long pipe is spread out in the radial direction, plastic deformed, and expanded.

(0010)

At that time, because it is expanded while said radial expansion rollers revolve the interior surface of said long pipe, the frictional resistance between the interior surface of the long pipe and the expansion mandrel is extremely small. Therefore, the expansion mandrel is able to move smoothly through the inside of the long pipe with low movement resistance, so it is possible to increase processing speed. Furthermore, the tractive force and the pressing force necessary to insert the expansion mandrel can be small, and energy efficiency can thus be increased without the generation of heat such as frictional heat. Moreover, this eliminates the rippling phenomenon that occurs on the surface of the long pipe due to the fact that the mandrel does not move smoothly due to frictional resistance, and it is thus possible to improve processing accuracy.

(0011)

In this case, if said radial expansion rollers are multiply arranged at equal intervals in the circumferential direction of the mandrel main body, the interior surface of the long pipe will radially expand through the expansion force that is uniformly dispersed circumferentially, so it will be possible to increase the circularity of the cross sectional shape of this radially expanded long pipe, and to radially expand with high dimensional accuracy.

(0012)

In this case, said expansion mandrel main body should be formed in a multistage manner such that the radius progressively increases towards the rear edge from the front edge that is passed into the long pipe, and said radial expansion rollers should be multiply established circumferentially at equal intervals on each radial region. By doing so, the radial expansion of the long pipe is divided into multiple stages and performed gradually. Accordingly, the frictional resistance in each stage is reduced, the load of the radial expansion rollers is lightened, and it is possible to increase the processing speed.



(0013)

Furthermore, said expansion mandrel main body should be established on the tip of a plunger that can advance and retreat freely and can revolve freely, and the revolution direction of said radial expansion rollers should be established having a slight inclination with respect to the pipe length direction of the long pipe corresponding to said advancement/revolution of the plunger. By doing so, the expansion mandrel also revolves circumferentially while advancing through the inside of the long pipe through the advancement and revolution of the plunger, and the radial expansion rollers are thereby uniformly pressure welded to the interior surface of the long pipe and it is possible to obtain a long pipe that has high circularity. Moreover, because the expansion mandrel travels forward through the inside of the long pipe while revolving, movement in that traveling direction is performed smoothly, and expansion is performed quickly.

(0014)

The expansion method for long pipe of the present invention is summarized in that the expansion mandrel is passed through one of the opening ends of the long pipe to be expanded, and the interior surface of said long pipe is pressed outward by radial expansion rollers that are established on the periphery of the expansion mandrel.

(0015)

In this case as well, if the system is configured such that (1) as in Claim 2 or Claim 3, the radial expansion rollers are multiply established at equal intervals in the circumferential direction of the mandrel main body, or the expansion mandrel main body is formed in a multistage manner such that the radius progressively increases towards the rear edge from the front edge that is passed into the long pipe, and said radial expansion rollers are multiply established circumferentially at equal intervals on each radial region, and furthermore, (2) as described in Claim 4, the expansion mandrel main body is established on the tip of a plunger that can advance and retreat freely and can revolve freely, and the revolution direction of the radial expansion rollers is established having a slight inclination with respect to the pipe length direction of the long pipe corresponding to said forward revolution of the plunger, then expansion processing will be performed energy efficiently and smoothly, and it will be superior with respect to processing dimensional accuracy as described above.

(0016)

(Embodiments of the Invention)

An ideal embodiment of the present invention is described in detail below with reference to the drawings. Figure 1 shows an outline view of the state in which the expansion mandrel of one example of embodiment of the present invention passes into the long pipe that is radially expanded. It shows a cross sectional view with regard to the long pipe. This expansion mandrel 20 is integrally established on the tip of plunger 24 on a hydraulic cylinder that is not shown in the figure, and the mandrel main body 25 gradually increases the diameter in a multistage manner from the first radial region 21a to the fifth radial region 21e between the front edge that is passed into long pipe 26 and the rear edge of the plunger side. Then the spaces between each radial region 21a ~ 21e take tapered shapes.

(0017)

Radial expansion rollers 23, which are each pressure welded to the interior surface of long pipe 26 and are revolvable in the rough pipe length direction of pipe 26 through the extension movement of said plunger 24, are multiply established (four rollers each in this example of embodiment) circumferentially at equal intervals on each radial region 21a ~ 21e of said mandrel main body 25. Moreover, said plunger 24 is configured such that it performs the advancing and retreating movement and the revolving movement through the inside of long pipe 26 as shown.

(0018)

Figure 2 shows a cross sectional view of the pipe length direction of the expansion mandrel shown in Figure 1. One each of said radial expansion rollers 23 is arranged in the radial expansion roller mounting holes that are established in positions that divide each of the peripheries of the second radial region 21b to the fifth radial region 21e into four equal parts. The revolution direction is established in a slightly inclined direction with respect to the pipe length direction of the long pipe, and radial expansion rollers 23 are configured such that they advance in the opposite direction (the opposite direction of the direction indicated

by arrow B) with respect to the spiral revolution direction (the direction indicated by arrow B) of mandrel main body 25 through the combination of the advancement (the direction indicated by arrow C) and revolution (the direction indicated by arrow D) of said plunger 24.

(0019)

As for the arrangement positions of the four radial expansion rollers 23 that are arranged on each of the second radial region 21b and the fourth radial region 21d and the arrangement positions of the four radial expansion rollers that are established on each of the third radial region 21c and the fifth radial region 21e, they are established alternately shifted by 45° angles in the circumferential direction. Each of the radial expansion rollers 23 are pressure welded to the interior surface of long pipe 26, and they are configured such that they, while pressure expanding this interior surface outward in the radial direction and plastic deforming it, advance while revolving in the direction of arrow B, which has a slight inclination with respect to the pipe length direction of the long pipe.

(0020)

Figure 3 shows a cross sectional view of the direction (pipe radial direction) that is orthogonal to the pipe length direction of said expansion mandrel shown in Figure 1. Four radial expansion rollers 23 are arranged circumferentially at equal intervals on radial region 21b of main body 25 of this expansion mandrel 20. Each of the radial expansion rollers 23 are pressure welded to the interior surface of long pipe 26 such that the expansion mandrel main body 25 can perform the thrusting movement while smoothly revolving in accordance with the extension movement and the revolution movement of said plunger 24, and they are arranged such that the directions in which the radial expansion rollers 23 advance are directions that are each inclined with respect to the pipe length direction.

(0021)

For example, the radial expansion roller 23 that is arranged on the upper portion in Figure 3 is established such that the mounting position of the right-hand edge of the revolution axis is more in the foreground facing the figure than the mounting position of the left-hand edge. Likewise, the other radial expansion rollers 23 are also each established such that the mounting position of the edge in the clockwise direction of the revolution axis is more in the foreground than the mounting position of the edge in the counterclockwise direction.

(0022)

Therefore, when using an expansion mandrel 20 that has been configured in this way to expand a long pipe 26 made of steel, by passing this expansion mandrel 20 into one of the opening ends of the inside of long pipe 26 as shown in Figure 1 and Figure 2 and advancing plunger 24 while revolving it with a hydraulic cylinder not shown in the figure, as the first stage, the four radial expansion rollers 23 that are established on the second radial region 21b of this expansion mandrel 20 are pressure welded to the interior surface of long pipe 26, and in step with the revolution of each of these radial expansion rollers 23, the pipe wall of the portion of long pipe 26 to which each of these radial expansion rollers 23 was welded are spread radially outward.

(0023)

Next, the four radial expansion rollers 23 that are established on the third radial region 21c of this expansion mandrel 20 are pressure welded to the radially expanded interior surface of this long pipe 26, and the pipe wall of this portion is spread radially outward. Furthermore, the four radial expansion rollers 23 that are established on the fourth radial region 21d of this expansion mandrel 20 are pressure welded to the radially expanded interior surface of this long pipe 26, and the pipe wall of this portion is spread radially outward.

(0024)

As the final stage, the four radial expansion rollers 23 that are established on the fifth radial region 21e of this expansion mandrel 20 are pressure welded to the radially expanded interior surface of this long pipe 26, and the pipe wall of this portion is spread radially outward. Circular cross section long pipe 26, in which the entire length is radially expanded, is obtained by passing the expansion mandrel 20 of this embodiment into the entire long pipe 26 in this way. The interior diameter becomes approximately equal to

a circle circumscribed around the four radial expansion rollers that are established on the fifth radial region 21e.

(0025)

Next, long pipe 26 is gradually expanded in a multistage manner by radial expansion rollers 23, 23 ..., which are respectively established on the second through fifth radial regions 21b ~ 21e of the expansion mandrel 20. During this time, because radial expansion rollers 23, 23... advance through the interior surface of long pipe 26 while rotating, the frictional resistance between the interior surface of long pipe 26 and radial expansion rollers 23, 23... is small, and smooth expansion processing can thus be conducted.

(0026)

Moreover, because there is almost no generation of frictional heat on the interior surface of long pipe 26 or mandrel main body 25 of expansion mandrel 20 or radial expansion rollers 23, 23... due to the fact that this frictional resistance is small, [sic] there is no energy loss accompanying expansion processing, and therefore the load of the hydraulic cylinder that advances this expansion mandrel 20, for example, can be small.

(0027)

Furthermore, because the advancing movement of the expansion mandrel is performed smoothly within long pipe 26, there is no occurrence of the rippling phenomenon on the pipe surface at the time of expansion, and pipe that is superior with respect to radial dimensional accuracy can be obtained.

(0028)

The present invention is not limited to the previously described embodiment, and various alterations are possible to an extent that does not deviate from the purport of the present invention. For example, the previously described embodiment shows a configuration that expands by driving an expansion mandrel into the long pipe through extension movements of a plunger, but a configuration that expands by pulling the expansion mandrel through constriction movements is also possible. Moreover, the number of radial expansion rollers that are arranged on each radial region of the mandrel main body is not limited to four each, and it is also possible to arrange three rollers or five or more rollers. It goes without saying that the greater the number of radial expansion rollers arranged on each radial region of the expansion mandrel, the closer the cross sectional shape of a long pipe that uses the mandrel will be to a perfect circle.

(0029)

Furthermore, radial expansion rollers were arranged in a row on the radial regions of each stage in the previously described embodiment, but if they are arranged in multiple rows with the arrangement positions of each row mutually out of phase, it is possible to arrange a greater number of radial expansion rollers at equal intervals on the periphery of the expansion mandrel, and by using this expansion mandrel, it is possible to increase the circularity of the long pipe cross section following processing. Moreover, it would be acceptable to configure the entire shape of mandrel main body 25 into a tapered shape such that the diameter gradually changes from a small diameter to a large diameter from the front edge to the rear edge.

(0030)

(Effects of the Invention)

Through the expansion mandrel and the expansion method that uses this mandrel in the present invention, when expanding long pipe made of steel, the interior surface of the long pipe is pressed outward by radial expansion rollers that are established on the periphery of the expansion mandrel main body and it is advanced through the inside of the long pipe through the revolution of the radial expansion rollers, so the frictional resistance at the time of expansion is small, and it is possible to improve the processing energy efficiency because it is possible to reduce the occurrence of frictional heat. Furthermore, the expansion mandrel is able to travel smoothly through the inside of the long pipe, so the processing speed and the prevention of the generation of ripples on the pipe surface are improved, and it is extremely effective to apply it to the expansion operation for oil drilling pipe, for example.

(0031)

Moreover, as with the invention described in Claim 2, if radial expansion rollers are multiply arranged at equal intervals in the circumferential direction of the mandrel main body, the circularity of the cross sectional shape of the expanded long pipe increases, and it is possible to expand with good dimensional accuracy. Furthermore, as with the invention described in Claim 3, with an invention in which the expansion mandrel main body is formed in a multistage manner such that the radius progressively increases towards the rear edge from the front edge that is passed into the long pipe, and said radial expansion rollers are multiply established circumferentially at equal intervals on each radial region, the loads of the radial expansion rollers of each stage are reduced and it is possible to increase the processing speed.

(0032)

Furthermore, as with the invention described in Claim 4, if the expansion mandrel main body is established on the tip of a plunger that can advance and retreat freely and can revolve freely, and the revolution direction of said radial expansion rollers is established having a slight inclination with respect to the pipe length direction of the long pipe corresponding to said forward revolution of the plunger, then when advancing the expansion mandrel through the inside of the long pipe while rotating circumferentially, the radial expansion rollers make contact uniformly with the interior surface of the long pipe, and in addition to obtaining a long pipe with high circularity, the invention has the advantages that movement in this travel direction is performed smoothly and expansion is performed quickly.

(Brief Description of the Figures)

(Figure 1)

Outline view of the state in which the expansion mandrel of one embodiment of the present invention passes into the long pipe that is radially expanded.

(Figure 2)

Cross sectional view of the pipe length direction of the expansion mandrel shown in Figure 1.

(Figure 3)

Cross sectional view of the direction (pipe radial direction) that is orthogonal to the pipe length direction of the expansion mandrel shown in Figure 1.

(Figure 4)

Outline view of the generally known conventional tapered expansion mandrel.

(Explanation of the Symbols)

|    |                             |
|----|-----------------------------|
| 20 | Expansion Mandrel           |
| 21 | Radial Region               |
| 23 | Radial Expansion Roller     |
| 24 | Plunger                     |
| 25 | Expansion Mandrel Main body |
| 26 | Long Pipe                   |

[see source for figures]

(Figure 1)

(Figure 2)

(Figure 3)

(Figure 4)

Load P



### AFFIDAVIT OF ACCURACY

I, Kim Stewart, hereby certify that the following is, to the best of my knowledge and belief, true and accurate translations performed by professional translators of the following patents/abstracts from Japanese to English:

*Patent 64-75715*

*Patent 2000-94068*


*Patent 2000-107870*

Kim Stewart  
TransPerfect Translations, Inc.  
3600 One Houston Center  
1221 McKinney  
Houston, TX 77010

ATLANTA  
BOSTON  
BRUSSELS  
CHICAGO  
DALLAS  
FRANKFURT  
HOUSTON  
LONDON  
LOS ANGELES  
MIAMI  
MINNEAPOLIS  
NEW YORK  
PARIS  
PHILADELPHIA  
SAN DIEGO  
SAN FRANCISCO  
SEATTLE  
WASHINGTON, DC

Sworn to before me this  
26th day of February 2002.

Signature, Notary Public

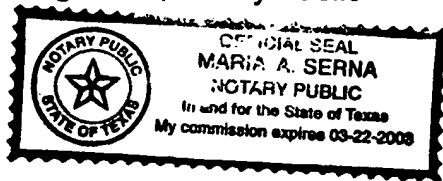

Stamp, Notary Public

Harris County

Houston, TX

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**